

AD-A051 476

FOREIGN TECHNOLOGY DIV WRIGHT-PATTERSON AFB OHIO
PRODUCTION AND ABSORPTION OF BRAKING RADIATION WITH MAXIMAL ENE--ETC(U)
AUG 77 A A VOROBEV, V A VOROBEV
FTD-ID(RS)T-1449-77

F/G 20/8

UNCLASSIFIED

| OF |
AD
A051 476



END
DATE
FILMED
4-78
DDC

AD-A051476

1

FTD-ID(RS)T-1449-77


FOREIGN TECHNOLOGY DIVISION



PRODUCTION AND ABSORPTION OF BRAKING RADIATION
WITH MAXIMAL ENERGY 5-1000 MEV IN ALKALI-HALIDE
CRYSTALS

by

A. A. Vorob'ev, V. A. Vorob'ev,
et al.



Approved for public release;
distribution unlimited.

EDITED TRANSLATION

FTD-ID(RS)T-1449-77

25 August 1977

MICROFICHE NR:

AD-77-C-001111

CSP73088798

PRODUCTION AND ABSORPTION OF BRAKING RADIATION
WITH MAXIMAL ENERGY 5-1000 MEV IN ALKALI-HALIDE
CRYSTALS

By: A. A. Vorob'ev, V. A. Vorob'ev, et al.

English pages: 12

Source: Radiatsionnaya Fizika Nemetallicheskikh
Kristallov, No. 3(3), 1971, PP. 84-94

Country of origin: USSR

Translated by: LINGUISTICS SYSTEMS, INC.

F33657-76-D-0389

Mark C. Reynolds

Requester: FTD/ETDP

Approved for public release; distribution unlimited

ACCESSION NO.	
FTD	World Service <input checked="" type="checkbox"/>
DDI	Dist. Service <input type="checkbox"/>
REMARKS/NOTES	
JUSTIFICATION	
BY	
DISTRIBUTION/AVAILABILITY CODE	
Dist.	AVAIL. and/or SPECIAL
A	

THIS TRANSLATION IS A RENDITION OF THE ORIGINAL FOREIGN TEXT WITHOUT ANY ANALYTICAL OR EDITORIAL COMMENT. STATEMENTS OR THEORIES ADVOCATED OR IMPLIED ARE THOSE OF THE SOURCE AND DO NOT NECESSARILY REFLECT THE POSITION OR OPINION OF THE FOREIGN TECHNOLOGY DIVISION.

PREPARED BY:

TRANSLATION DIVISION
FOREIGN TECHNOLOGY DIVISION
WP-AFB, OHIO.

FTD

ID(RS)T-1449-77

Date 25 Aug 19 77

Production and Absorption of Braking Radiation with Maximal Energy 5-1000 Mev in Alkali-halide Crystals

by

A.A. Vorob'ev, V.A. Vorob'ev, E.K. Zavadovskaya, G.P. Sokolov
and A. V. Pushkin

The practical utilization of sources of braking radiation in radiation physics and radio-physical technology demands a knowledge of the amount of radiation absorbed due to the occurrence of crystal defects. In order to compare and correlate the alterations in the properties of irradiated materials with the qualitative and quantitative characteristics of a beam of radiation it is necessary to know the distribution of absorbed energy, and the spectral distribution of the primary and secondary quanta and particles in each element of the irradiated specimen [1-3,5].

We have conducted an investigation of the production and absorption of braking radiation with maximal energy in the range 5-1000 Mev in crystals of potassium chloride, iodide, and bromide, sodium chloride, lithium fluoride in specimens of aluminum, iron, copper, and lead.

For braking radiation of maximal energy up to 50 Mev a program was worked out to calculate, by a method of statistical testing, the spectral composition of the primary and secondary radiation, the coefficients of attenuation and absorption, and the energy accumulation and absorption factors.

The program we used in our work allowed us to calculate from one batch of raw data all the above parameters for thicknesses of the absorber up to 10-15 times the mean free path of the quanta. In this

1

form the program is original, and saves significant amounts of time in complex investigations, including the calculation of various parameters of the radiation field.

This program allows us to compute, simultaneously, the build-up factors, the coefficients of attenuation, the mean energy of the spectral quanta, the spectral distribution of the primary and the scattered radiation fluxes, the distribution of the absorbed energy, and the signal-noise ratio, all normalized to the case of incident radiation at $1\text{Mev/cm}^2\text{-sec}$. Calculations are in progress for the case of barrier radiation from external sources with a random energetic spectrum, with axially symmetric field, for five radiation field of various characteristics, and of various dimensions [4]. This program allows one to do calculations for barriers of various materials and thickness, up to 20 mean free paths.

This program is executed segmentally, and all results are normalized as stated above.

Experimental investigations were conducted with the aid of X-ray film, ionization chambers, scintillation counters, and calorimeters; these were used to measure various parameters of the absorbed radiation. We created a specialized unit out of a calorimeter and a thick-walled ionization chamber, which may be adapted for absolute measurement of the dose rate, and for the calibration of the X-ray film, and a thin-walled ionization chamber, which is used for relative measurements.

The following results were obtained in our investigations.

The distribution of the absorbed energy versus the depth of the barrier in the whole range of braking radiation energies 5-1000 Mev is described by a transition curve, with a maximum. The slopes of the rising and falling sides of the experimental curves decrease with the growth of the maximal energy of the braking radiation and with the reduction of the effective atomic number and density of the barrier material /Fig. 1 a, b, and Fig. 2/.

An increase in the effective atomic number of the absorber material leads to the fact that the depth at which the maximum of the depth-distribution of the absorbed energy /DDAE/ occurs is reduced /Fig. 3 b/. The relationship between the depth at which half-maximum occurs vs. the maximal energy is displayed in /Fig. 4a/, and vs. the effective atomic number in /Fig. 4b/; these are analogous to the corresponding relations for the /DDAE/ in /Fig. 3 a, b/.

The dose at the surface of the specimen, irradiated by the braking radiation decreases with the growth of the maximal energy of the braking radiation /Fig. 5a/, and grows with the increase of the effective atomic number of the absorber material /Fig. 5b/.

The absorption of the energy of the braking radiation, after the beam passes through the barrier, with the growth of E_{\max} , up to 30-40 Mev, decreases, owing to the decrease of Compton scattering. In the range $E_{\max} > 100$ Mev, this scattering again increases, due to the development of an electron-photon cascade /Fig. 6 a, b/.

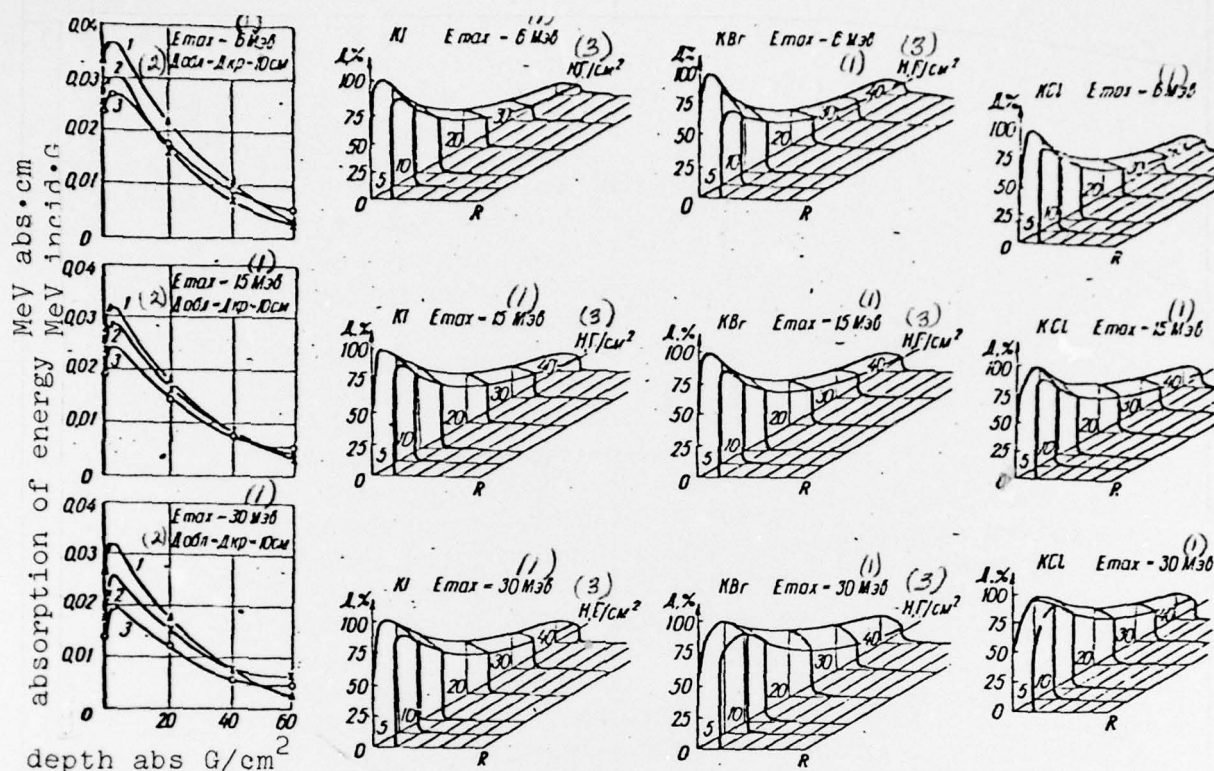


Figure 1. Depth (a) and Volume (b) Distributions of Absorbed Energy: Curve 1 - KJ, 2 - KB, 3 - KCl KEY: (1) $M_{30} = \text{MeV}$; (2) $\Delta_{0.01} - \Delta_{0.02} = D_{irr} = D_{cr} = 10$; (3) $H\Gamma/\text{cm}^2 = \text{NG}/\text{cm}^2$.

The variations in the flux of the braking radiation, as it passes through the barrier, with the maximal energy in the range 5-30 MeV, have a common character. As the thickness of the barrier increases radiation fluxes are formed, the spectral composition of which, under further increase in absorber thickness, change little. The relationships of the average energy of the braking spectrum and the coefficient of attenuation with the increase of absorber thickness, are described by curves which tend toward saturation, which occurs at a thickness somewhat more than double that of the thickness at which the half-maximum occurs (Figure 7).

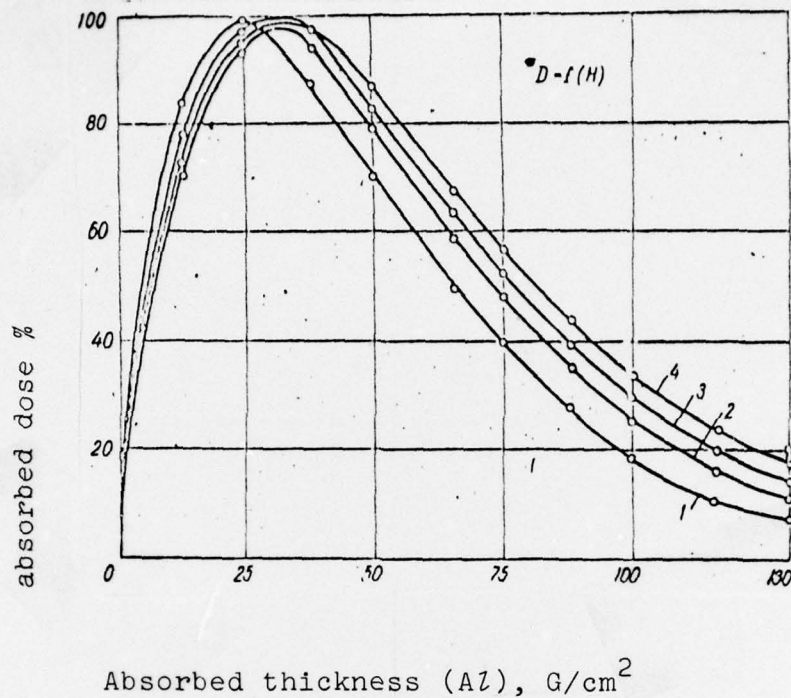


Figure 2. Depth distribution of Absorbed Energy in Aluminum
 curve 1 - 250 MeV; 2 - 500 MeV; 3 - 750 MeV; 4 - 1000 MeV.

As the beam cross-section is increased the build-up factor also increases, and an insignificant variation in the attenuation factor also occurs. With the beam diameter greater than 20 cm the value of the buildup factor, for the braking radiation, no longer changes, and its value may be equated to the theoretical value, calculated for a beam with large finite cross-section (Figure 6a and b).

For materials with effective atomic number in the range 6-50 the relationship between the build-up factor

and the maximal energy of the braking radiation is described by a graph, which, beginning with about $E_{\max} = 20$ Mev, tends to saturate. /Fig.8/.

The value of the build-up factor, for single thickness barriers in Δ relation to the effective atomic number up to Z_{eff} 25-80 tends to increase, while for still greater effective atomic numbers tends to decrease.

An increase in the maximal energy of the braking radiation causes a displacement of the transition graph toward the side representing greater barrier thicknesses.

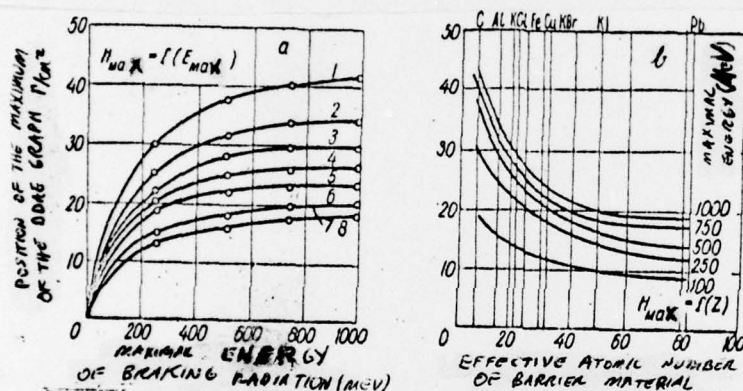


Fig.8. MAXIMA OF DDAE CURVES IN RELATION TO THE MAXIMAL ENERGY OF THE BRAKING RADIATION $|E|$, AND EFFECTIVE ATOMIC NUMBER OF THE ABSORBER $|Z|$:
CURVE 1 - GRAPHITE; 2 - ALUMINUM; 3 - POT. CHLORIDE;
4 - IRON; 5 - COPPER; 6 - POT. BROMIDE; 7 - POT. IODIDE; 8 - LEAD.

In the range $E_{\max} < 100$ Mev an increase in the maximal energy of the braking radiation leads to an increase in the depth, at which the maximum of absorbed radiation would occur, according to a linear law for the above process. Further growth of the maximal energy leads to a decrease in the slope of the graph describing the relationship between the maximal energy and the position of the maximum of the DDAE.

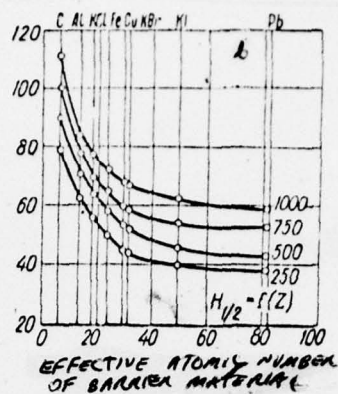
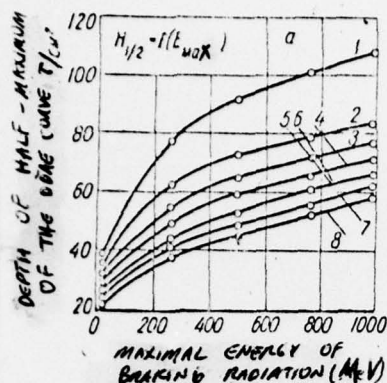


Fig. 4.

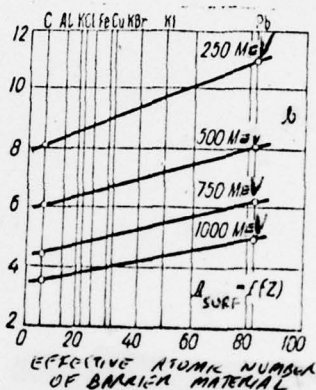
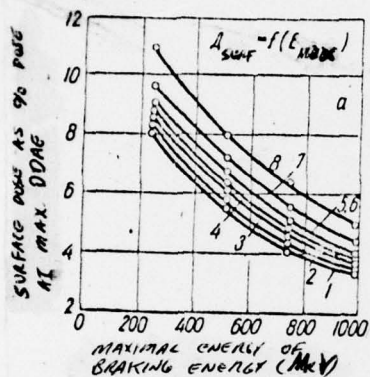


FIG. 5. VALUE OF SURFACE DOSE UNDER SAMPLE IRRADIATION BY BRAKING RADIATION IN RELATION TO THE MAXIMAL ENERGY OF THE BRAKING RADIATION /a/ AND EFFECTIVE ATOMIC NUMBER OF ABSORBER /b/.

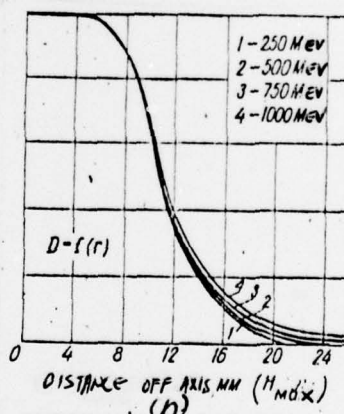
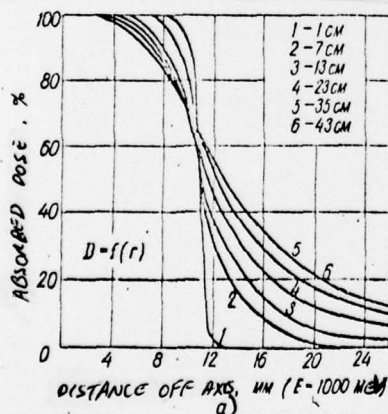


FIG. 6. SPREAD OF ABSORBED RADIATION OUTSIDE BEAM LIMITS OF BRAKING RADIATION, WITH ITS PASSAGE THROUGH ALUMINUM /a/, AND ITS RELATION TO THE RADIATION ENERGY /b/.

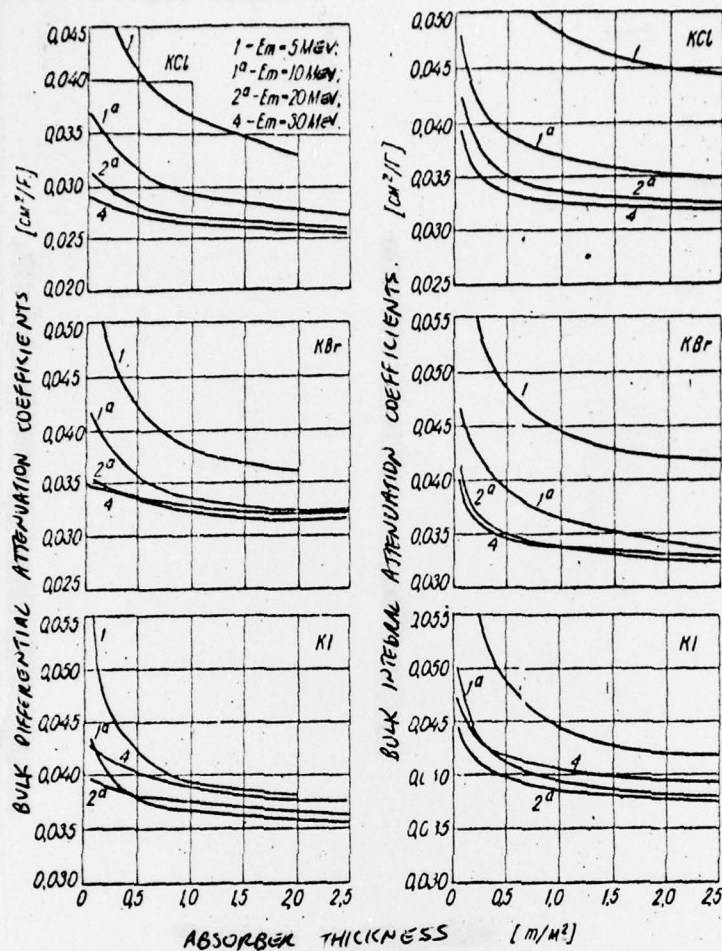


Fig. 7. ATTENUATION COEFFICIENTS

An increase in the effective atomic number of the absorber material leads to a reduction in the thickness ^{of the layer} which separates the maximum ^{in depth of distribution absorbed} of the (DDAE) from the surface of the sample. ^{energy} in g/cm^2 (Figure 6a).

The degree to which the variation of the spectral composition of the flux of braking radiation, of the coefficients of attenuation, of the build-up factors, and of the distribution of the absorbed radiation obeyed the relationships which we have detailed, which connect

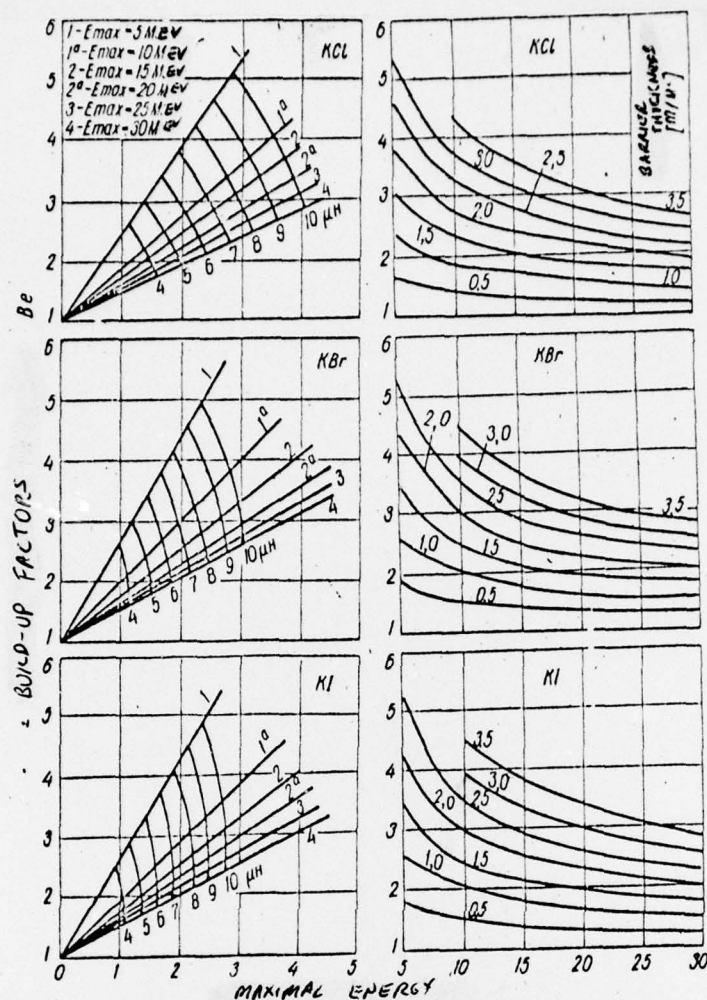


FIG. 8. BUILD-UP FACTORS OF BRAKING RADIATION
IN ALKALI-HALIDE CRYSTALS

the above with the thickness and effective atomic number of the absorber, and the energetic and geometric parameters of the radiation flux, was measured by us for the range $E_{\max}=6-50$ Mev. This data can be used in work in the fields of radiation physics, radio-physical technology, and also in other investigations of quantities or laws, related with the characteristics we studied.

In order to study the distribution of the flux of braking radiation beyond a barrier with an inhomogeneous structure, we developed an attractive mathematical

model which allows us to study the transmitted radiation easily.

The flux distribution beyond a barrier, composed of heterogeneous granules, in which the particles within the aggregate have a close-to-petrographic composition, is determined from the density of the substance of the aggregate, as well as from the density of the matrix in which it is embedded, through the linear coefficients of attenuation, and the differential coefficients of linear inhomogeneity.

The nonuniformity of the secondary radiation flux, in comparison with the nonuniformity in the primary radiation flux, is small, and it is possible to disregard it if the size of the aggregate granules is significantly smaller than the thickness of the barrier.

By 'coefficient of linear inhomogeneity', which comes in in the description of the degree of barrier inhomogeneity, we mean the ratio of the sum of the chords between the bodies in the aggregate along the ray-path, with the entire path, followed by the ray in this direction. For structures with particles distributed by form or dimension this coefficient carries a statistical significance. The average value along all parallel paths (directions) through a given volume of the barrier represents the geometric density of the packing of the particles within the given volume of the matrix.

For random structures our mathematical model showed that, in the first approximation, the fluctuations in the coefficient of linear inhomogeneity are proportional to the density of the aggregate, and the standard deviation is inversely proportional to the thickness of

the barrier. However, when a barrier diameter of some tens of particle-diameters is reached, further variation in the standard deviation is insignificant.

The correlation function of the linear inhomogeneity has, in the first approximation, a linearly-decreasing character in relation to the argument, equal approximately to the average radius of the particles. In the previously mentioned case the correlation function is zero. The amplitude of subsequent variation of this correlation function is insignificant. On the basis of these results a method was developed, involving the development of a pseudo-random number generator, for modelling the radiation field beyond a barrier with granular structure of known density (aggregate density), and with known fluctuations in the linear inhomogeneity given.

This method of mathematical modelling, for the electromagnetic fields of the braking radiation, gives us the required tools to conduct an investigation of the distribution of absorbed radiation in samples located inside various envelopes, and beyond barrier of inhomogeneous materials.

References

1. Vorob'ev, V.A. - Sokolov, G.P. Transmission spectra and attenuation coefficients for braking radiation in alkali-halide crystals, Trans. Univ., Physics, 1967, 1.
2. Vorob'ev, V.A., Distribution of absorbed electromagnetic radiation in alkali-halide crystals in relationship with the conditions of exposure, In the book: Radiation Physics of Nonmetallic Crystals. Papers of the Conference "Naukovo Dumka" ("Scientific Thought"), Kiev, 1967, 322

3. Vorob'ev, V.A. -Sokolov, G.P. Transmission of braking radiation through alkali-halide crystals, with various collimated beams, Trans. Univ., Physics, 1967, 12, 110
4. Vorob'ev, V.A. -Sokolov, G.P. Absorption of braking radiation in alkali-halide crystals of various chemical compositions, Trans.Univ., Physics, 1967, 7, 147
5. Vorob'ev, V.A. et.al. An investigation of the transmission and absorption of braking radiation in alkali-halide crystals, Trans.Univ.,Physics, 1969, 12.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER FTD-ID(RS)T-1449-77	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) PRODUCTION AND ABSORPTION OF BRAKING RADIATION WITH MAXIMAL ENERGY 5-1000 MEV IN ALKALI-HALIDE CRYSTALS		5. TYPE OF REPORT & PERIOD COVERED Translation
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) A. A. Vorob'ev, V. A. Vorob'ev, et al.		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Foreign Technology Division Air Force Systems Command U. S. Air Force		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS		12. REPORT DATE 1971
		13. NUMBER OF PAGES 12
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number)		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) 20		

DD FORM 1 JAN 73 1473

EDITION OF 1 NOV 65 IS OBSOLETE

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

DISTRIBUTION LIST

DISTRIBUTION DIRECT TO RECIPIENT

ORGANIZATION	MICROFICHE	ORGANIZATION	MICROFICHE
A205 DMATC	1	E053 AF/INAKA	1
A210 DMAAC	2	E017 AF/ RDXTR-W	1
B344 DIA/RDS-3C	8	E404 AEDC	1
C043 USAMIA	1	E408 AFWL	1
C509 BALLISTIC RES LABS	1	E410 ADTC	1
C510 AIR MOBILITY R&D	1	E413 ESD	2
LAB/FIO		FTD	
C513 PICATINNY ARSENAL	1	CCN	1
C535 AVIATION SYS COMD	1	ETID	3
C557 USAIIC	1	NIA/PHS	1
C591 FSTC	5	NICD	5
C619 MIA REDSTONE	1		
D008 NISC	1		
H300 USAICE (USAREUR)	1		
P005 ERDA	1		
P055 CIA/CRS/ADD/SD	1		
NAVORDSTA (50L)	1		
NASA/KSI	1		
AFIT/LD	1		

FTD-ID(RS)T-1449-77